




Smart **Wi-Fi** single plug

User guide

Thank you for purchasing the **Smart Wi-Fi plug** from Nexxt Solutions. We are excited to be part of making your life easier, safer and for bringing peace of mind into your home.

Product overview

1. Power/Reset button
2. LED status light
3. Outlet

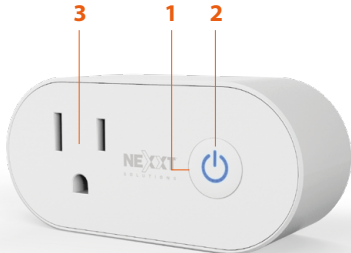


Package content

- Smart plug
- Quick start guide

Status indicator


LED indicator	Status	Description
Blue	Blinking	The smart plug is in pairing mode
	Solid	The smart plug is on
	Off	The smart plug is off

Installing the Nexxt Solutions Home App

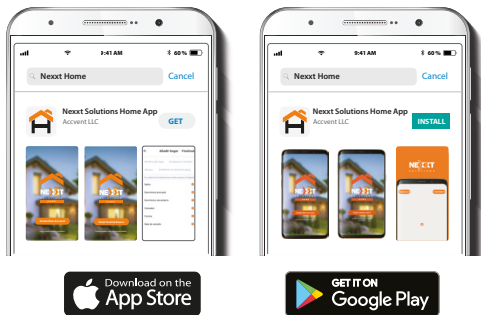


Download the Nexxt Home app on Google Play or Apple App Store.

Step 1

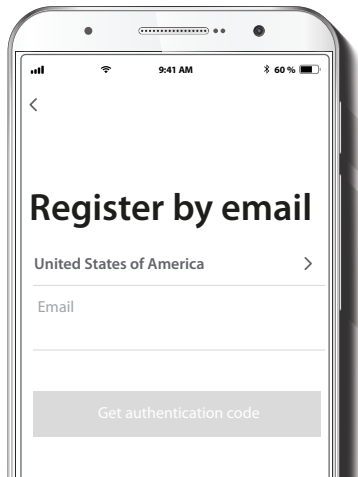


Register by email. Fill in the required fields.

Step 2

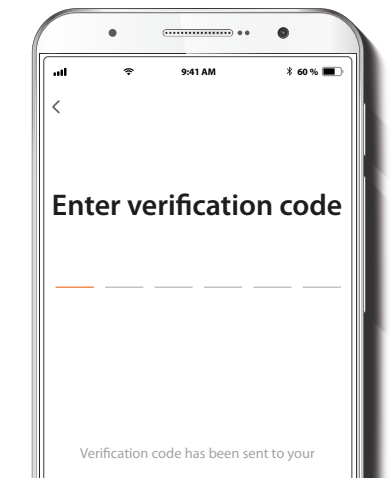

Enter the verification code you received.

Step 3

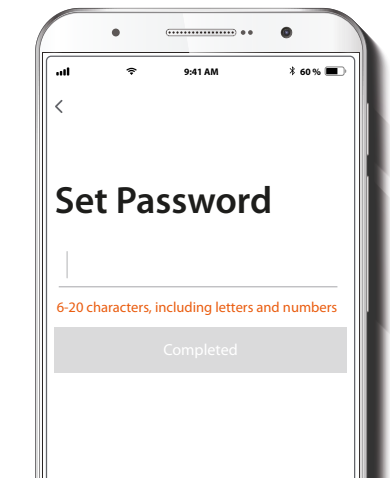

Create a new password and then select **Completed**.

Step 4



The Nexxt Solutions Home App has been successfully set up.


Plug in




Plug in the Nexxt Smart plug. Make sure the blue LED on the device is blinking, indicating that it has entered into the pairing process. Otherwise, press and hold the power/reset button until the blue LED light starts flashing.

Add device

Step 1

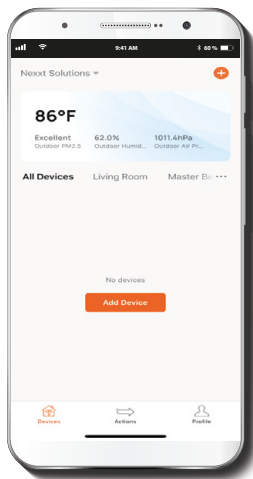


Press **Add device** or click on + icon, followed by the Smart plug.

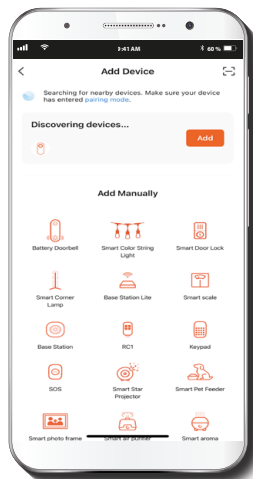


The LED indicator light must start blinking. Otherwise, press and hold the reset button on the unit for 10 seconds until the blue LED blinks fast.

Step 2

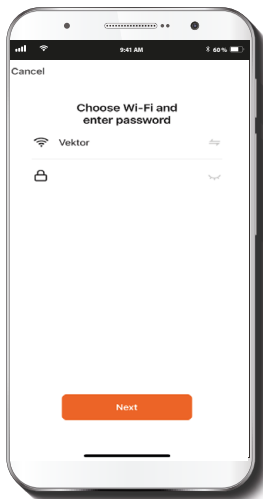


You must connect to a **2.4GHz Wi-Fi network**. Enter your network password. Make sure you enter the correct password, otherwise the device will not connect. It may take around 30 seconds to add the device, depending on the Wi-Fi connection.

Step 3

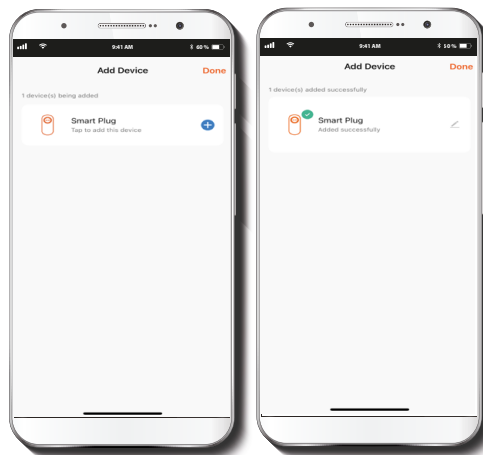

If pairing is successful, the notification **Added** will be displayed on the screen.

Device name

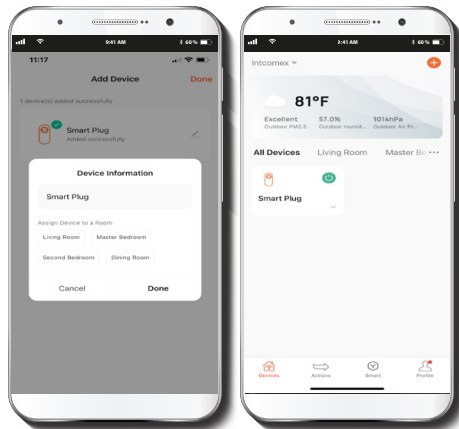


To rename the device, click on the pencil icon on the screen, enter a different name, and then click on **Save** to store your settings.

Main interface



The main interface has a menu at the bottom of the screen which includes: **Power, Timer, and Setting**. Tap on **Power** on the screen to turn the Smart plug on or off.


Timer

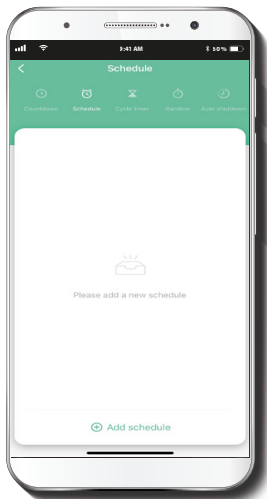

The **Timer** function includes:

- **Countdown:** Allows you to set a countdown timer for a given amount of time to cause the device to turn on or off.
- **Schedule:** Click on **Add Schedule** to access the **Add Schedule** screen. Set the day or days you wish to schedule and then the times. Click on **Save** on the upper right-hand corner to store a schedule.
- **Cycle timer:** Creates a cycle with times to turn the relay switch on and off.
- **Random:** Sets up a period of time when the switch turns on and off randomly.
- **Auto shutdown:** Configures a period of time that once is complete, the relay switch turns off.
- **Astronomical:** Configures the city or town and the time zone in the Next Home app. The app detects the local time and sets up turn on and off times according to sunrise and sunset.


Settings

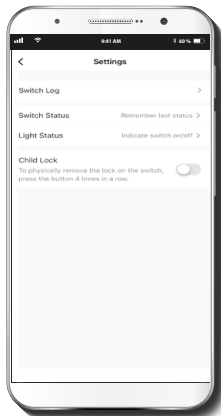

This setting menu at the bottom of the screen enables the configuration of the following functions:


- **Switch Log:** Displays the activity log on the screen.
- **Switch Status**
- **Light Switch**
- **Child Lock**

Relay status

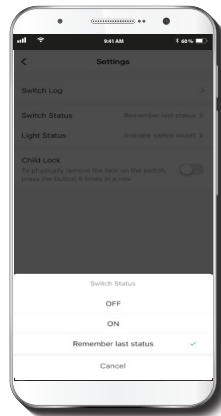


Switch Status: Determines the status of the switch when electrical power comes back after a power outage. It can be set in status **On**, **Off**, or **Remember last status** before a power outage occurs.

Light Status

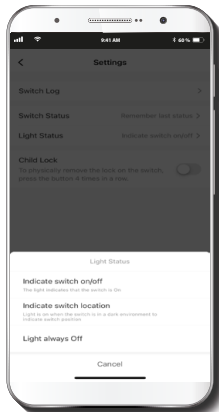


- Light Mode:** This setting offers three options to configure the LED light.
- Indicate switch on/off: The LED light is on when the switch is on, and the LED light is off when the switch is off to easily identify the current status of the device.
 - Indicate switch location: Suitable for dark places or in the middle of the night, the LED is on, to make it easier to locate the switch.
 - Indicate LED off: Keeps the LED light always off.

Child lock

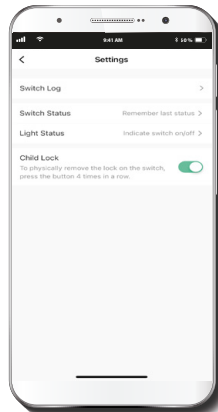


- Allows the user to enable or disable the physical control of the switch.
- Note:** The lock can be manually disabled by pressing the button on the switch four consecutive times.

Settings

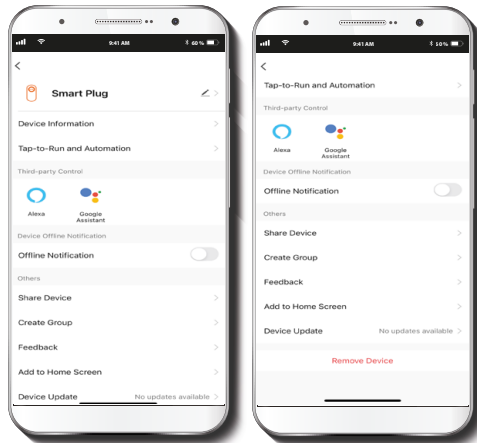


Smart relay switch

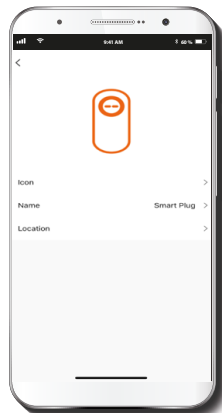


Click on the pencil icon to change the icon, name, and location of the switch.

Device information

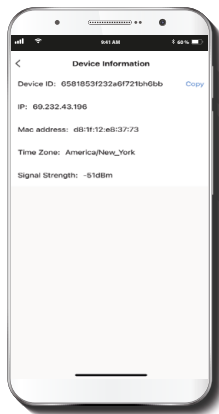

Displays the device ID, IP address and time zone.

Device network

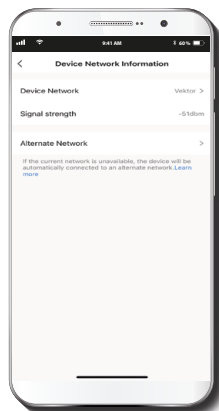


Displays the network that the relay switch is connected to, and the signal strength.

Tap to run and automation: Links the smart relay switch with other smart products to automatically control them through a customized command.

Offline notification: Provides a selection button to enable/disable this feature.


Share device

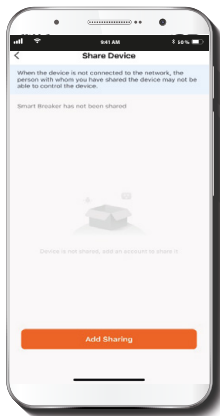

Click on **Add sharing**. Enter the e-mail address of family and friends. Tap on **Done**. The newly configured users will now have access to your smart relay switch.


Note: Family or friends need their own Nexxt Home account to access the device.

Create group

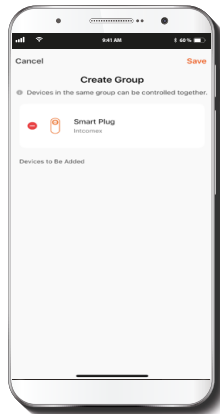

Makes management of devices easier by selecting and arranging multiple units under a single group.

Feedback

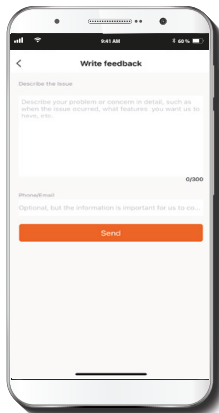


Let us know if you have any issues setting up the product.

Add to home screen



This is a newly added UI interface which provides direct access to the main controls of the device by adding a shortcut to the main screen on your mobile phone.

Device update

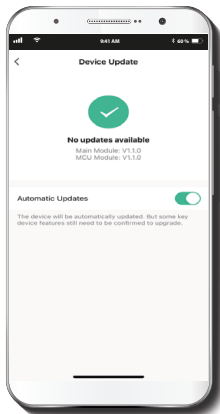

Adds new features or provide updates with a new firmware upgrade. You can choose to have it automatically updated by clicking the button below.

Remove device: allows you to unbind the device from the Nexxt Home Account.

X4YHAPS611

Nexxt Solutions® is a registered trademark. All rights reserved. Amazon, Alexa, and all related logos are trademarks of Amazon.com, Inc. or its affiliates. Google, Android, and Google Play are trademarks of Google LLC. All other brand names and trademarks are the property of their respective owners. Made in China.



Smart **Wi-Fi** plug