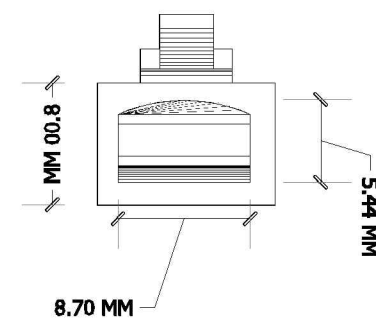
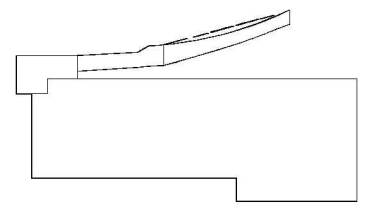

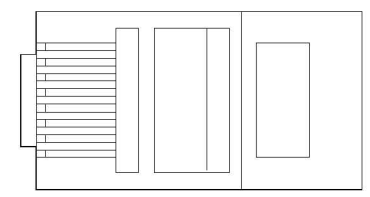
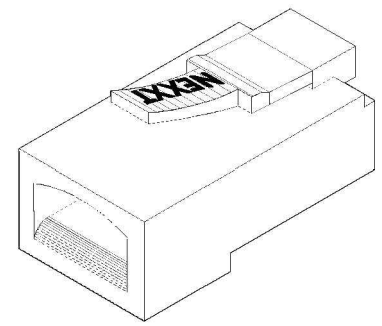
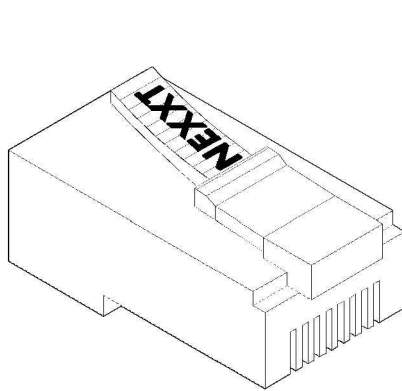


Product Specifications

Plug Characteristics

Housing Material & Color Polycarbonate, UL 94V-2, Transparent color
Contact Terminal Material & Finishing: Phosphor Bronze with 50 micro-inch Gold plated over 50 micro-inch Nickel plated on contact area

Gold plating 50μ-inch

Contact Type Straigth Pin

Cable-to-Plug Tensile Strength

7.7 Kgs between Cable and Plug

Hole Connector Entrance

24 - 26 AWG stranded and solid wires

Wiring

T568A & T568B

Operating Temperature

-40°C to 80°C (ISO/IEC 11801, ANSI/TIA/EIA-568-C.2)

Transmission Characteristics

Transmission Speed (Mbps) 100

Bandwidth (Mhz) 100

SCALE 2:1

DATE: JUN 2014 DRAWING: S V			
ITEM N°: AW102NXT02 DES : RJ45 Cat.5e Plug, 50μ			
SHEET	1 OF 1	SCALE	2:1

NEXXT
SOLUTIONS