

Product Specifications

Panel Characteristics

Front Panel Steel Plate Cold Rolled Commercial, 1.5mm thickness with Black Color (RAL9005) painted

Support Bar Steel Plate Cold Rolled Commercial, 1.5mm thickness with Black Color (RAL9005) painted

Rear Panel Steel Plate Cold Rolled Commercial, 1.5mm thickness with 5 to 8um Nickel painted

Panel Color Black Color Varnish Painted (RAL 9005)

Effective U Space 2U - 48PORT

Mounting Type Rack Mounted

Jack Bracket Set ABS, UL 94V-0

PCB FR4, UL 94V-0

Insertion Force 30N max (IEC 60603-7-5)

Retention Strength 7.7 Kgs between Jack and Plug

Operating Temperature -10°C to 60°C (ISO/IEC 11801, ANSI/TIA/EIA-568-C.2)




Dimensions

Height (in/mm) 3,5in / 88,9mm - 48PORT

External Width (in/mm) 19,22in / 488,2mm

Depth (in/mm) 110mm - 48PPORT

Includes 4 M5 x L12mm screw set

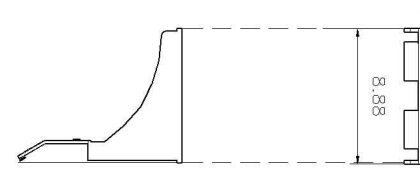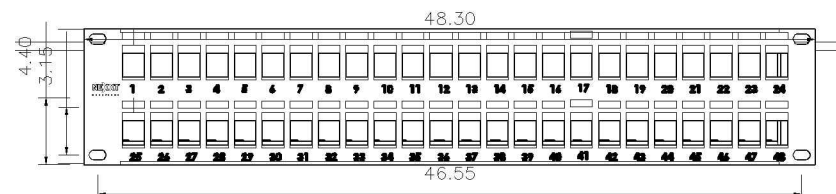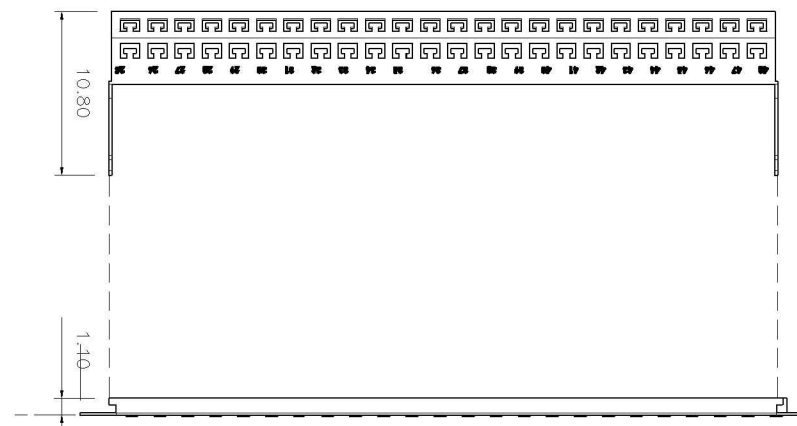

NEXXT SOLUTIONS			
DATE: JUN 2014			
DRAWING: ZARRAGA			
ITEM N°: AW192NXT41			
DES : Modular Patch Panel 48 port for RJ45 Keystone Jack			
SHEET	1 OF 1	SCALE	1 : 2