


2-post, 19-inch open rack

Steel frame with square holes

25U/45U

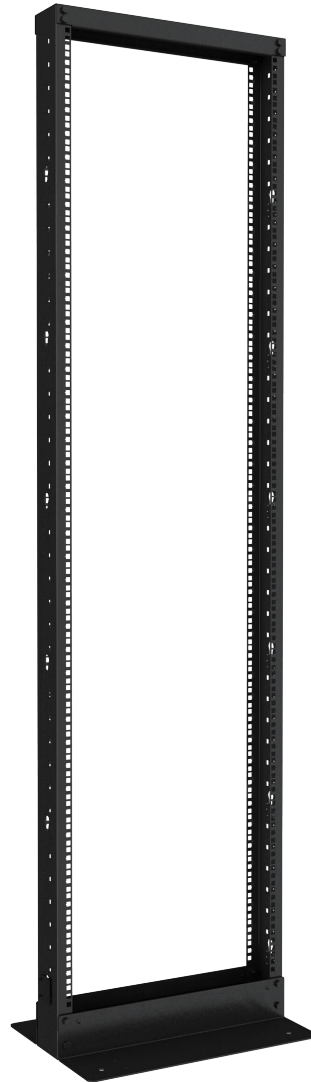

*NPO-2P25UB
NPO-2P45UB*

The two-post open racks from Nexxt Solutions are constructed of heavy-duty steel, allowing the safe integration of networking equipment and additional accessories in environments or areas that do not require a lockable rack solution. Designed for easy deployment in high-load and high-density infrastructures, this metalwork component is ideal for housing diverse IT equipment and other voice/data devices where space is at a premium. Easy to install and to assemble, our open racks offer a cost-effective solution for applications requiring increased flexibility, accessibility, and cable management capabilities. Available with 25 and 45 rack spaces.

Main features

- 2-post, floor-standing open frame rack
- Supports stationary loads of up to 992lb (450kg)
- Ample ventilation and unobstructed airflow keep your equipment at room temperature
- It provides a convenient solution with easy access to your cabling, IT and communications components
- Front and rear equipment installation for larger networking systems
- Numbered square-hole mounting positions for faster attachment of 19-inch components
- Powder coat finish prevents damage caused by rust and other external factors

www.nexxtsolutions.com

Nexxt Solutions® ("Nexxt") is a registered trademark. Nexxt reserves the right to change any specifications without prior notice. The information contained in this product sheet is the proprietary property of Nexxt, and may not be used, reproduced or disclosed to others, in whole or in part, without written authorization of Nexxt. Although Nexxt has taken precautions to ensure the accuracy of the product specifications at the time of publication, however, we cannot be responsible for the errors, omissions, or changes due to obsolescence. If you would like to know more about our products, please visit our website at www.NexxtSolutions.com.

2-post, 19-inch open rack

Steel frame with square holes

25U/45U

Technical specifications

Open rack characteristics		
Color	Black varnish paint (RAL 9005)	
Effective U space	25U	45U
Structure type	Full-knocked down (FKD)	
Mounting type	Floor mounted	
Pole quantity	2	
Hole size/type	Square holes	
Access type	Vertical rail + top bracket + base bracket	
Material (base bracket)	SPCC*, 11 gauge	
Material (other components)	SPCC, 13 gauge/2.28mm thickness	
Dimensions		
External height	49.2in/1249mm	84.2in/2138mm
Internal height	44.3in/1125mm	79.3in/2014mm
External width	20.2in/514mm	20.2in/514mm
Internal width	19in/483mm	19in/483mm
External depth	14.3in/364mm	14.3in/364mm
Max. device depth	14.3in/364mm	14.3in/364mm
Static load capacity	992.1lb/450kg	992.1lb/450kg
Includes	2 vertical rails 2 base stands 2 base extension plates 1 top bracket 1 bottom bracket Assembly hardware kit Equipment mounting hardware kit User manual	
Certifications and standards		
International standards	CE	
Certifications and approvals	RoHs, Reach	
Miscellaneous		
MPN	NPO-2P25UB	NPO-2P45UB
UPC	798302036307	798302036314
Labeling	NEXXT SOLUTIONS	
Packaging	Carton box	
Cu.ft.	0.85	1.44
Warranty	5-year limited warranty**	

*SPCC: Commercial grade, cold rolled steel sheets

**For warranty details, visit www.nexxtsolutions.com/warranty

