


4-post open rack

19in/42U

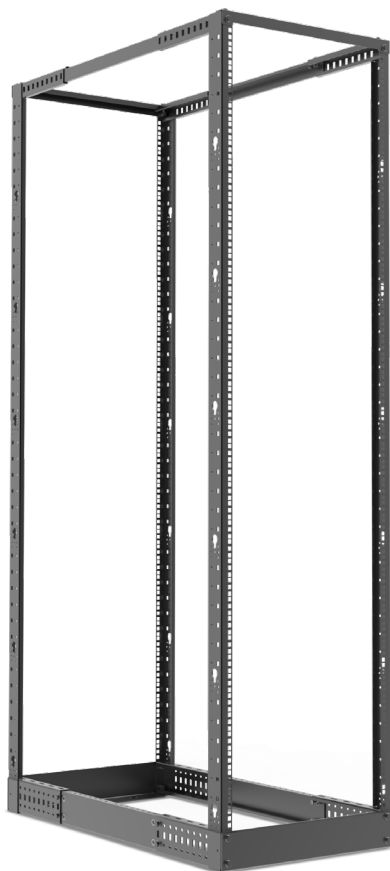

NPO-4P42UBA

Related products



AW220NXT07



AW220NXT25



PCGPSM01U24ANBK

Our four-post open rack is constructed of heavy-duty steel, allowing the safe integration of networking equipment and additional accessories in environments or areas that do not require a lockable rack solution. Designed for easy deployment in high-load and high-density infrastructures, this metalwork component is ideal for housing diverse IT equipment and other voice/data devices where space is at a premium. Easy to install and to assemble, our open racks offer a cost-effective solution for applications requiring increased flexibility, accessibility and cable management capabilities. Available with 42 rack spaces.

Main features

- 4-post open frame rack, fully knocked down
- Built to EIA industry standard, with premium grade cold rolled steel sheets
- Supports stationary loads of up to 771lb
- Adjustable mounting depths (from 22 to 40 inches)
- Provides unobstructed airflow and easy access to installed equipment and cabling
- Front and rear equipment installation for larger networking systems
- Numbered square-hole mounting positions for faster attachment of 19-inch components
- Powder-coat finish prevents damage caused by rust and other external factors

4-post open rack

19in/42U

Technical specifications

Open rack characteristics	
Color	Black varnish paint (RAL 9005)
Rack size	6.6ft
Effective U space	42U
Structure type	Full-knocked down (FKD)
Mounting type	Floor mounted
Pole quantity	4
Hole size/type	Square holes
Access type	Left and right vertical rail + Base bracket + Bottom corner and center section + Top left and right corner section + Top center section + Top bracket
Material (cover)	SPCC*, 13 gauge/2.28mm thickness
Material (frame)	SPCC*, 13 gauge/2.28mm thickness
Material (base)	SPCC*, 11 gauge
Dimensions	
External height	79.0in/2006 mm
Internal height	73.6in/1870 mm
External width	22.6in/516mm
Internal width	19in/483mm
External depth	22.3in/567mm - 40.3in/1024mm
Max. device depth	40.3in/1024mm
Static load capacity	771.6lb/350kg
Dynamic load capacity	00lb/ 00kg
Includes	2 left vertical rails 2 right vertical rails 2 base brackets 2 top brackets 4 bottom corner rails 2 bottom center beams 2 top left corner rails 2 top right corner rails 2 top center beams Assembly hardware kit Equipment mounting hardware kit User manual
Certifications and standards	
International standards	CE
Certifications and approvals	RoHs, Reach
Miscellaneous	
MPN	NPO-4P42UBA
UPC	798302036321
Labeling	NEXXT SOLUTIONS
Packaging	Carton box
Cu.ft.	
Warranty	5-year limited warranty**

*SPCC: Commercial grade, cold rolled steel sheets

** For warranty details, visit www.nexxtsolutions.com/warranty

