

1 2 3 4 5 6 7 8

A

B

C

D

E

F

A

B


C

D

E

F

$\varnothing 7.30\text{MM} \pm 0.3\text{mm}$

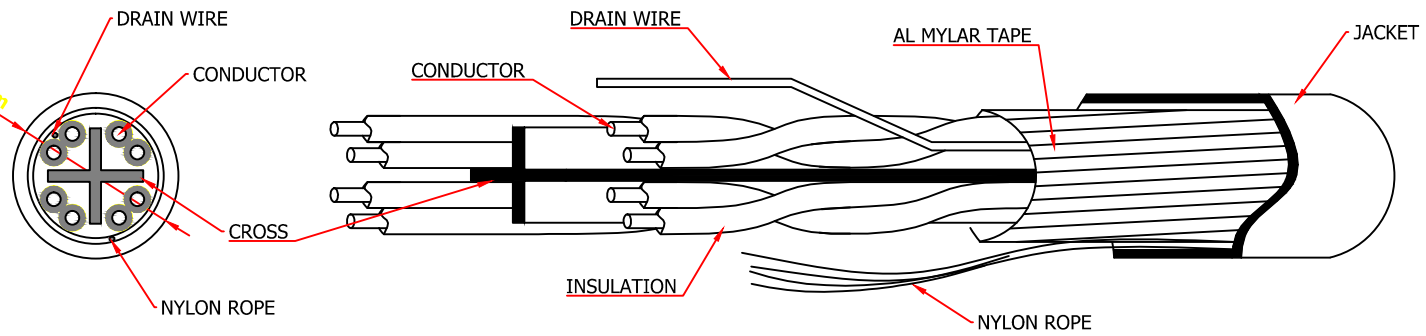

Product Specifications

Wire Characteristics

Cable Type F/UTP "Foiled Unshielded Twisted Pair"

Number of Pairs 4

Number of Wires 8

Wire Type Solid Bare Copper

Wire Gauge Size 23 AWG

Internal Characteristics

Internal Jacket Material HDPE(CMI-75E)

Average Min. Thickness 0.28 mm

Min. Thickness 0.22 mm

Color Combinations

Pair 1 Blue and White / Blue

Pair 2 Orange and White / Orange

Pair 3 Green and White / Green

Pair 4 Brown and White / Brown

Shield Type Drain wire (tinned copper conductor) and aluminum-mylar tape

External Characteristics

External Jacket Designation CMX

External Jacket Material 75°C PVC CMX (CMI-800) -

For External Use


Average Min. Thickness 0.585 mm

Min. Thickness 0.458 mm

Average Cable Diameter 7.3 mm +/- 0.3mm

Max. Strength 11 Kg

Available Jacket Colors Black

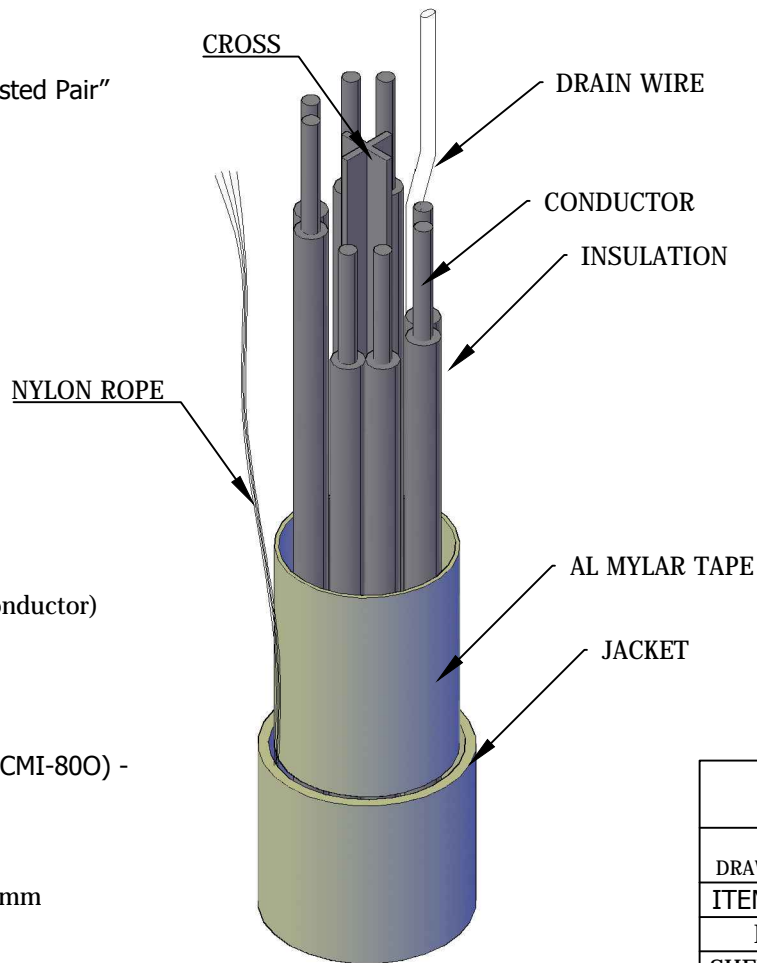

NEXXT SOLUTIONS			
DATE: JUN 2014		DRAWING: SV	
ITEM N°: PCGUCC6FTBK			
DES : CABLE F/UTP CAT.6 -23AWG 4 PR			
SHEET	1 OF 1	SCALE	3:1

1 2 3 4 5 6 7 8